spirit.

technical data.

home 30

gluedown
plank: 1219 × 184 mm – box: 15 planks (=3,364 m2) – Pallet: 95 boxes (=319,62 m2)
tile: 914,4 × 609,6 mm – box: 9 (=5,017 m2) – Pallet: 56 boxes (=280,94 m2)

click
plank: 1210 × 176,6 mm – box: 12 planks (=2,564 m2) – Pallet: 65 boxes (=166,68 m2)

product specifications.

		gluedown 30 plank	gluedown 30 tile	click 30
Total thickness	EN ISO 24346	2 mm	2 mm	3,4 mm
Thickness of the wear layer	EN ISO 24340	0,3 mm	0,3 mm	0,3 mm
Total weight	EN ISO 23997	3,445 kg/m2	4 kg/m2	6,6 kg/m2
Usage classification	EN ISO 10582	23/31	23/31	23/31

test results.

Underfloor heating	EN ISO 12524	suitable – max. 27°C (80°F)/electrical floor heating systems: max 60 W/m²		
Castor chair	EN ISO 4918	pass	pass	pass
Fire resistance	EN ISO 13501–1	Bfl-s1	Bfl-s1	Bfl-s1
Chemical resistance Light fastness	EN ISO 26987	OK	OK	OK
Light fastness	EN ISO 105-B02	> 6	> 6	> 6
Thermal resistance	EN 8302	0,01 m² K/W	0,01 m² K/W	0,011 m² K/W
Residual indentation	EN ISO 24343–1	<0,1mm	<0,1mm	<0,1mm
Slip resistance	DIN 51130	R10	R10	R10
	EN ISO 13893	class DS	class DS	class DS
Sound reduction: impact sound	EN ISO 717–2	2 dB	2 dB	3 dB
Reflected walking sound	EPLF draft 021029–3–2004	xxx	xxx	39 SONE (49% sound reduction)
Dimensional stability	EN ISO 23999	< 0,15 %	< 0,15 %	< 0,15 %
Residential warranty		15 y	15 y	15 y
Formaldehyde	EN ISO 717–1	E1	E1	E1
Lock strength	EN ISO 10582	\	\	> 3 kN/m

ÉMISSIONS DANS L'AIR INTÉRIEUR* A+
*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)

4 bevels

EN 14041 CE 18 DOP: 454-TG3318-1 BerryAlloc NV Industrielaan 100 8930 Menen, Belgium NB: 0534 Resilient floor covering for use within building

SPIRIT HOME 30 GLUEDOWN

EN 14041 CE 18 DOP: 454-RC3118-1 BerryAlloc NV Industrielaan 100 8930 Menen, Belgium NB: 0534 Resilient floor covering for use within building

SPIRIT HOME 30 CLICK


Phthalate Free

eurofins INDOOR AIR COMFORT GOLD CERTIFIED PRODUCT

home 30

spirit.


spirit.
HOME 30 click

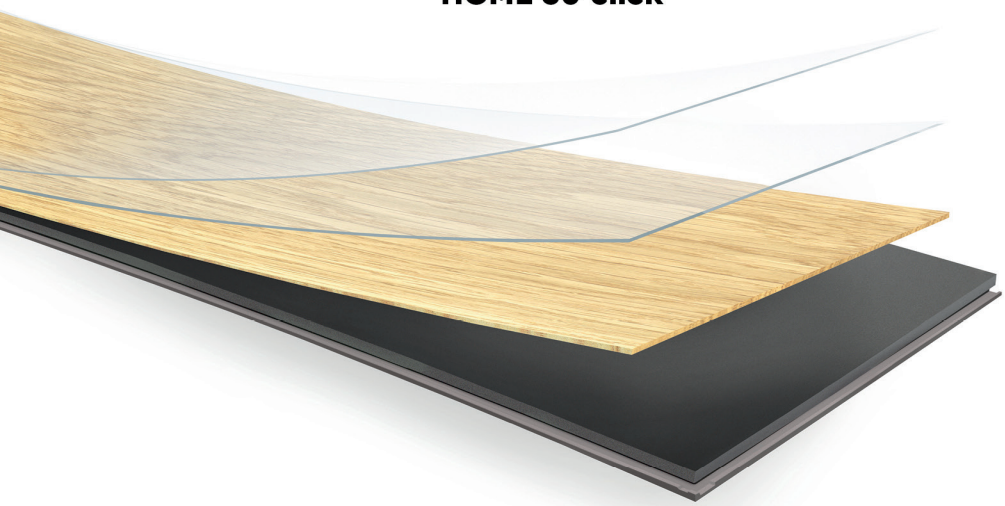

1. Protective PU lacquer
2. Wear layer 0.3 mm
3. Decorative printfilm
4. Rigid board

Total thickness: 3.4 mm

spirit.
HOME 30 gluedown

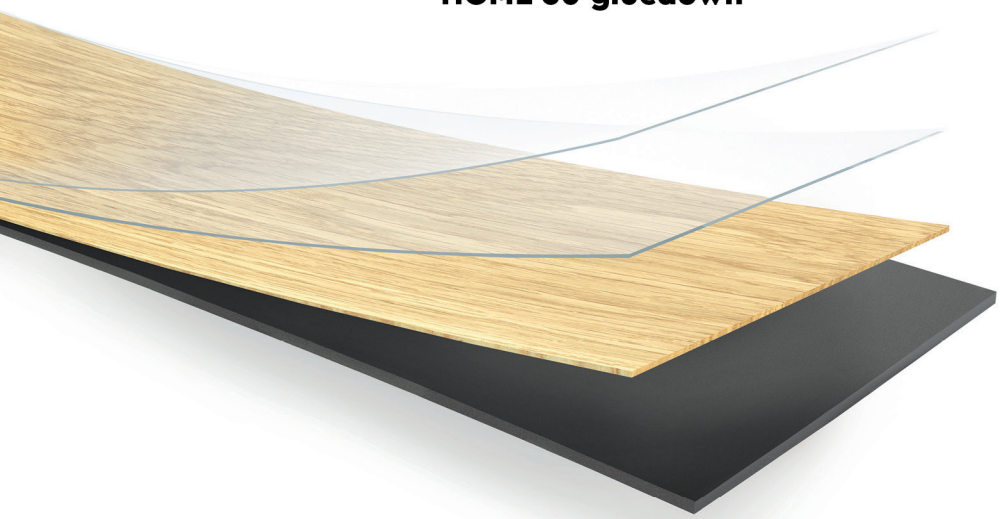

1. Protective PU lacquer
2. Wear layer 0.3 mm
3. Decorative printfilm
4. PVC backing layer

Total thickness: 2 mm